1877-78

Municipal

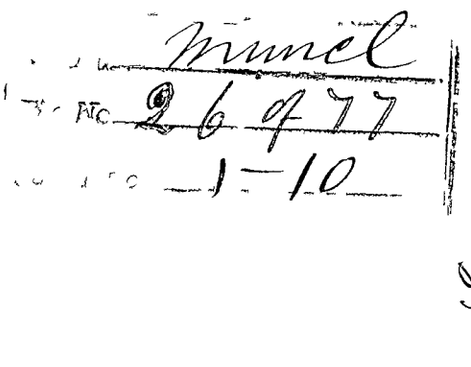

Incomplete
Indexed
TR

Municipal Works in C & M. Station Bangalore

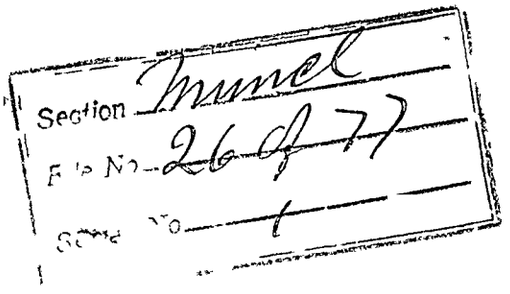

1878/79

From Predecessor Cantonment

The ~~Dy. Superintendent,~~ Mysore Comm^r ~~District~~

To The Secretary to The Chief ~~Engineer~~ Commissioner of Mysore.

Dated 13th May
Despatched 13 May } 1878
Received

Enclosures No.

General No. ——— } 18 —
No.

For remittance the Hiriyur Tehsildar's Bandy Hand Amounting to Rs 220

No. 16

Form B 1.

HEAD OF SERVICE. Original works

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Talook.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Converting the Clay Tope at Ulsoor into Band Stand	Cantonment	Original works	220	220		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
1080	Cft Earth work of filling in Sawfits	1 . 1/2	Cft	8	
22518	" Levelling ground & forming roads	1 . 1/2	"	59	
1033	Cyd Collecting Carting & Stacking Metal	1 . .	Cyds	166	
1033	" Spreading Do	1 . 2 .	"	13	
52 1/4	" Collecting Carting Stacking Gravel	1 . 5 .	"	16	
52	" Spreading and Consolidating	1 . 2 .	"	7	
52	" Collecting Carting & Spreading Sand	1 . 1/4 .	"	2	
	Contingencies			11	
	Total Rupees				220

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

N. B.—If the blank space be too small for the Abstract, please attach spare slip.

Bangalore
13th May 1878

President, Municipal Board,
Bangalore Cantonment.

Geo Clarke
Municipal Engineer.

Section Miscl
File No 26 of 77
Serial No 2

1878/79

From President Cantonment
The ~~Dy. Superintendent~~, Mind Com^r ~~District.~~
To The Secretary to Commissioner
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13 May } 1878
Received

Enclosures No.

General No. ——— } 18 —
No.

For constructing a Mab Stone Latrine at the Melkmanes village Richmond Town

Amounting to Rs 120

HEAD OF SERVICE. Original works Form B. 1.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head of service.	Amount allotted under this head during the year	Amount now sanctioned	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing a Slab Stone Culvert at the millmans village Richmond Town	Cantonment	Original Works	120	120		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
1070	Cft Excavation and Earthwork &c	. . 1/2	Cft	2-12-	
1	Painting	. . .		1-0-	
1	Color washing	. . .	.	2-1-	
33 1/3	Gravelling	. . 4	.	1-11-	
2	Cutting Stones	. 3 .	each	1-6-	
66	Stone Slabs	1 8 .	.	99-0-	
187 1/2	Filling with Stone Jelly & Sand	. . 10	Cft	9-12-	
	Contingencies			1-7-	
	Total				120

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

of 18 . } *N. B.—If the blank space be too small for the Abstract, please attach spare slip.*

Bangalore
18th May 1878

President, Municipal Board,
Bangalore Cantonment.

Off. Municipal Engineer

Section - Mysore
File No. 2647
Serial No. 3

From 1878/79
President Cantonment
The ~~Dy. Superintendent,~~
Mun[l] Com[rs] ~~District.~~
To The Secretary to
Commissioner
The Chief ~~Engineer~~ of Mysore.

Dated 13th May 1878
Despatched 13th May
Received

Enclosures No.

General No.
No. } 18 —

1/ For constructing Sun Screens to Beef Vendors Stalls Shooley

Amounting to Rs 120

No. 14

HEAD OF SERVICE. Original works — Form B. 2.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing Sun Servants Beef under Stall Shedlay	Cantonment	Original works	120	120		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
9/4	Cft of Teakwood wrought and put up	1 . .	Cft	37	
8	Iron bands	1 ½	each	10	
18	Iron hooks	. 6 .	.	7	
2	Sqrs of roofing with corrugated iron sheltering Cuplite	30 . .	.	60	
	Contingencies			6	
	Total Rupees				120

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

18 . } *N. B.—If the blank space be too small for the Abstract, please attach over slip.*

Bangalore
13th May 1878

President, Municipal Board,
Bangalore Cantonment.

J. Goal Municipal Engineer.

Section Mysore

File No 2697

Serial No 4

From 1878/79
President Cantonment
The ~~Dy. Superintendent~~,
Mysore Comm^r
To The Secretary to
Commissioner
The Chief ~~Engineer~~ of Mysore. ~~District~~

Dated 13th May } 1878
Despatched 13th May }
Received

Enclosures No.

General No. ——— } 18 —
No.

For constructing drain
sewers to mutton & fish
stalls in the Shevaga-
Market

Amounting to Rs 380

HEAD OF SERVICE. Original Works *Form B.*

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Talook.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing Sun Screens to Mutton Venders Stalls in the Thursday Market	Cantonment	Original Works	380	380		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
11½	C/F of Wood work	1 . .	C/F	46	
16	Iron Cramps	1 4 .	each	20	
30	Iron hooks	. 6	.	11	
3.27	3/27 of Corrugated Zinc roofing	30 . .	3/27	99	
	Scaffolding for Cutting up			5	
	Contingencies			9	
	Total for one side				190
	Total for two sides				380

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

N. B.—If the blank space be too small for the Abstract, please attach spare slip.

Bangalore
18th May 1878

President, Municipal Board,
Bangalore Cantonment.

Geo Gibson
Municipal Engineer

Station Tumkur

File No. 26 A 77

Serial No. 5

From 1878/79
President Cantonment
The ~~Dy. Superintendent~~,
Mun.l Com.rs ~~District.~~

To The Secretary
Commissioner
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13th May } 1878
Received

Enclosures No.

General No.
No. } 18 —

For Constructing Iron Screens to Vegetable Venders Stalls in Shanbag Market

Amounting to Rs 380

No. 12

HEAD OF SERVICE. Original Works — Form B. 2.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Talook.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing Sugi Sheds to the Vegetable Venders Stalls in Shoolay Market	Cantonment	Original Works	380	380		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate			Per	Total	
11½	Cost of wood work	4	.	.	Cft	46	
16	Iron bands	1	4		each	20	
30	Iron hooks		6		"	11	
3.29	Sqr Corrugated roofing	30	.	.	Sqr	99	5
	Scaffolding for putting up						
	Contingencies					9	
	Total Rupees for one side						190
	Total Rupees for two sides						380

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

18 . } *N. B.—If the blank space be too small for the Abstract, please attach separate slip.*

Bangalore
18th May 1878

President, Municipal Board,
Bangalore Cantonment.

Geo. L. Sim
Municipal Engineer.

Section Mined

File No. 26 of 77

Serial No. 6

From 1878/79 President Cantonments

The ~~Dy. Superintendent,~~ Mined Comrs ~~District~~

To The Secretary to Commissioner

The Chief ~~Engineer~~ of Mysore.

Dated 13th May } 1878

Despatched 13th May }

Received

Enclosures No.

General No. / No. } 18 —

For constructing a
bog drain from Timmiah
road to Broadway
Amounting to Rs 300

OF SERVICE. Original Works Form B. 1.

sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing a Bay drain from Timmiah Road to Broadway	Pantonment	Original Works	300	300		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
1020	Cost of Excavation	0 0 3½	Cft	3	
765	Cost of Stone flooring	8 0 0	Yd	61	
1020	Cost of Stone in Chunam for Side walls	0 2 3	Cft	11.3	
510	Superfices of Stone Slabs	0 1 6	Sqft	18	
	Earth behind the Side walls			30	
	Contingencies			15	
	Total Rupees				300

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

N. B.—If the blank space be too small for the Abstract, please attach spare slip.

Bangalore
18th May 1878

President, Municipal Board,
Bangalore Cantonment.

Municipal Engineer

Section Mines
File No. 2647
Serial No. 7

1878/79

From President Cantonment
The ~~Dy. Superintendent,~~ Mines Comm. ~~District.~~

To The Secretary to Commissioner
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13th May } 1878
Received

Enclosures No.

General No. / No. } 18 — .

For constructing a V Section drain at the Shorlay Bate market

Amounting to Rs 40

No. 7

HEAD OF SERVICE. Original Works — Form B. 2.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Constructing a V Section drain at the Poultry Market	Cantonment	Original works	110	110		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
55	Rft V Section drain	0 5 0	Rft	17	
99	Cft masonry stone in Chunam	0 2 6	Cft	15	
2	Stone Slabs flooring	0 11 0	each	2	
1	wooden door complete	5 0 0		5	
	Contingencies			1	
	Total Rupees				110

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

Dated 18 } *N. B.—If the blank space be too small for the Abstract, please attach over slip.*

Bangalore
18th May 1878

President, Municipal Board,
Bangalore Cantonment.

Geo Gibson
Municipal Engineer

Section Inwd
File No 2697
Serial No 8

18 78/79

From President Cantonment
The Dy. ~~Superintendent~~,
Inwd Comrs District.

To The Secretary to
Commissioner,
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13th May } 1878
Received

Enclosures No.

General No. ——— } 18 —
No.

For dismantling and reconstructing boy drain at north end of D. No: 5 Street Wlsoor
Amounting to Rs 380

NO. 1

HEAD OF SERVICE. Original Works Form B. 1.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head or service.	Amount allotted under this head during the year	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Dismantling & reconstructing bay drain at north end of P. No 5 Street Ulsoor	Cantonment	Original works	380	380		

Abstract of Estimate and general remarks [illegible] detail, &c.

Quantity	Items	Rate	Per	Cost	Total
411	Right of Dismantling & reconstructing bay drain with additional stones	8	Right	Do	
123	Right of Constructing bay drain	12	"	9 12	
39	Right Dismantling and reconstructing V Section drain	3	"	7	
90	Cft of Stone masonry dismantling and reconstructing	2	Cft	11	
60	Right of covering Slabs for roads	2	Right	8	
3866	Cft of Earthwork beyond the Stone Slabs	2	Cft	40	
	Putting up Stone pillars and Stone Slabs for V Section drain			3	
	Contingencies			12	
	Total Rupees				380

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

of 18 . } *N. B.—If the blank space be too small for the Abstract, please attach a slip.*

Bangalore
16th March 1898

President, Municipal Board,
Bangalore Cantonment.

Geo Gibbons
Offg Municipal Secy

Section Munct
File No 26 of 77
Serial No 9

From 1878/79
President Cantonment
The Dy. ~~Superintendent~~,
Mount Cantt ~~District~~
To The Secretary to
Commissioner
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13th May } 1878
Received

Enclosures No.

General No. / No. } 18 — .

For forming and gravelling the roads in Jayapallium at Hosoor
Amounting to Rs 300

No. 2

HEAD OF SERVICE. Original works Form B. 2.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Taluk.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
forming and gravelling the roads in Jail Pallam Cal Work	Cantonment	Original works	300	300		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate	Per	Cost	Total
25672	Cost of Excavation for forming roads	1/4	Cft	69	
179	Cost of Gravel collecting &c	5	Cyd	149	
479	&c of Spreading watering and ramming	2	"	59	
40	" of Collecting casting & Spreading Sand	1/4	"	10	
	Contingencies			13	
	Total Rupees				300

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

18 . } *N. B.—If the blank space be too small for the Abstract, please attach short slip.*

Bangalore
13th May 1878

President, Municipal Board,
Bangalore Cantonment.

Offg Executive
Municipal Engineer.

Subject Mysore

File No. 2697

Serial No. 10

1878/79

From President Cantonment
The ~~Dy.~~ ~~Superintendent~~,
Mysore Comm^{n}. ~~Distri~~

To The Secy to
The Chief ~~Engineer~~ of Mysore.

Dated 13th May
Despatched 13th Idem } 1878
Received

Enclosures No.

General No. / No. } 18 —

Reclining certain improvements on the north end of Pynes Road Street Mysore

Amounting to Rs 500

HEAD OF SERVICE. Original Works Form B. 1.

Notification of sanction for a work under 500 Rs. by the President, Municipal Board, Bangalore Cantonment.

NAME OF WORK.	Talook.	Sub-Head of service.	Amount allotted under this head during the year.	Amount now sanctioned.	Total sanctioned up to date.	Available Balance.
1	2	3	4	5	6	7
Making certain improvements on the north end of Pynee Moodr Street ulsoor	Cantonment	original works	500	500		

Abstract of Estimate and general remarks as to the necessity for the work, &c.

Quantity	Items	Rate.	Per	Cost	Total
418	Rft of dismantling and reconstructing Bay drain	" 1/4	Rft	104	
6035	C/ft of earthwork for raising & forming road	" 1/2	C/ft	31	
83 1/2	Syd of Gravelling the road	" 8	Syd	42	
1	Foot Path over waste weir water Channel			57	
	Compensation for land to be taken up for road				
82	Square yds of Ground	" 5	Syd	259	
	Contingencies			7	
	Total Rupees				500

Certified that the above sanction is not at variance with the provisions of Code, page 127, para 16.

of 18 } *N. B.—If the blank space be too small for the Abstract, please attach spare slip.*

Bangalore
May 1878

President, Municipal Board,
Bangalore Cantonment.

Geo Gibson
Municipal Engineer